



MODEL: YGY5032-3530SH

直流减速电机
DC GEAR MOTOR

圆睿鑫
YUANRUIXIN



典型应用Typical Applications:

- ※按摩器Massager
- ※医疗仪器Medical equipment
- ※健身器材Fitness equipment



齿轮箱长度 L Length of Gear	齿轮比Gear ratio
10.0	20

外形尺寸图Shape dimension figure

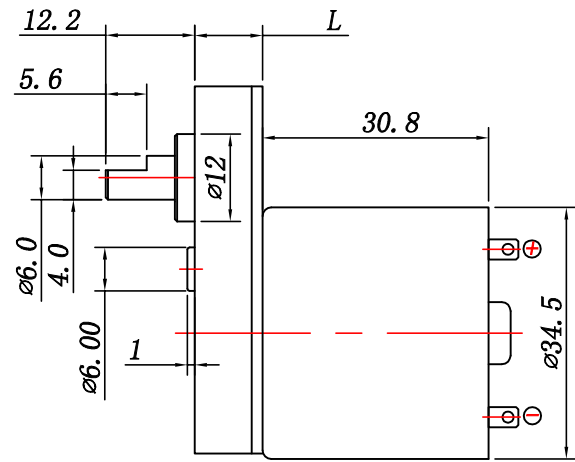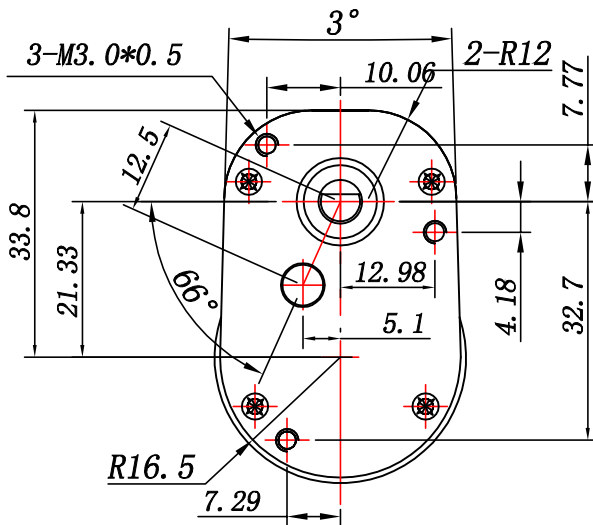

Unit: MM

电机参考值The motor reference

型号 MODEL	使用电压 VOLTAGE V	空载 NO LOAD		最大效率点 AT MAXIMUM EFFICIENCY				堵转 STALL			
		转速 SPEED r/min	电流 CURRENT A	转速 SPEED r/min	电流 CURRENT A	转矩 TORQUE mN.m	功率 OUTPUT W	转矩 TORQUE mN.m	电流 CURRENT A		
						kg.cm		kg.cm			
YGY5032-3530SH	DC12.0V	740	0.19	540	1.20	36.28	0.37	2.1	274.5	2.80	6.4
YGY5032-3530SH	DC6.0V	400	0.11	295	0.85	19.6	0.20	0.6	163.77	1.67	2.98
YGY5032-3540SH	DC24.0V	133	0.019	74	0.145	75.5	0.77	0.58	215.75	2.2	0.35

备注Note:

*如果以上马达规格参数包括形状尺寸未能符合要求，我们可以根据客户需要研发定做。

*In case the above specification include the shape and size of the motor can't meet requirements, we can develop and make custom one according to customer's requirement.